

RoHS Compliance

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.








1. MATERIAL:

HOUSING: PBT OR PA46, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-GRAY.
CONTACTS: PHOSPHOR BRONZE.


2. FINISH:

CONTACTS: GOLD PLATED ON ENTIRE CONTACT,
1.27 μ m [50 μ "] MIN. NICKEL UNDERPLATED
ALL OVER.

3. "▽" SHOWS QIP INSPECTION POINT.

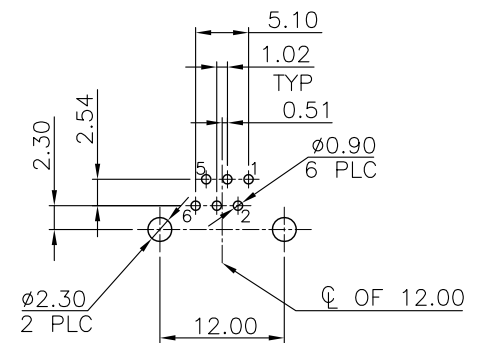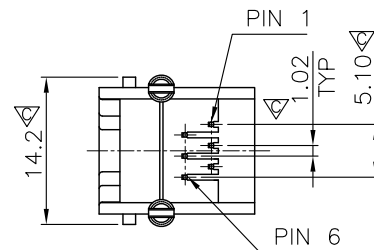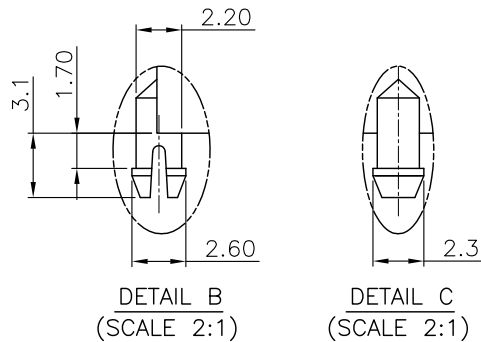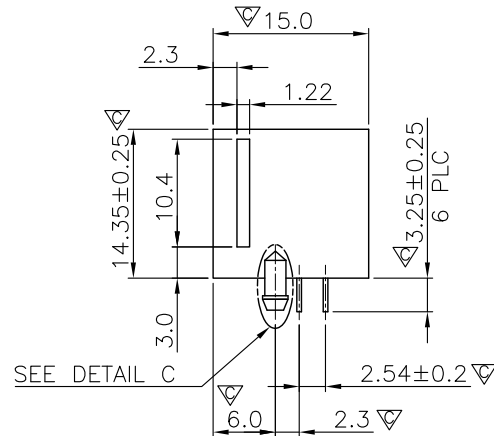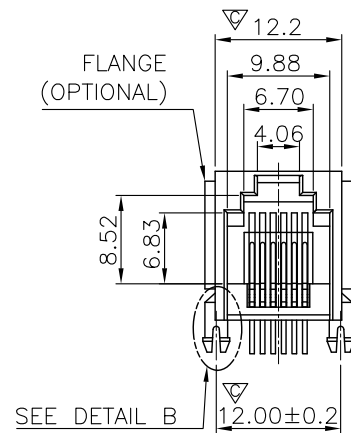

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)



LTR	DESCRIPTION	DATE	APVD
REVISIONS			

THIS DRAWING IS A CONTROLLED DOCUMENT. DO NOT SCALE DRAWING.			
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
THIRD ANGLE PROJECTION		0 PLC	± -
		1 PLC	± 0.25
		2 PLC	± 0.13
		3 PLC	± 0.05
		ANGLES	± -
MATERIAL		FINISH	
SEE NOTES		SEE NOTES	
DWN	A.HUANG	DATE	NOV-27-2013
CHK	M.CHANG	DATE	NOV-27-2013
APVD	W.J.YANG	DATE	NOV-28-2013



TITLE

6POSITION, LOW PROFILE,
SIDE ENTRY PCB JACK

SIZE
A3

CAUSE CODE

-

DRAWING NO

9606-6414

WEIGHT

- GRAMS Ref.

REV 3

SHEET 1