



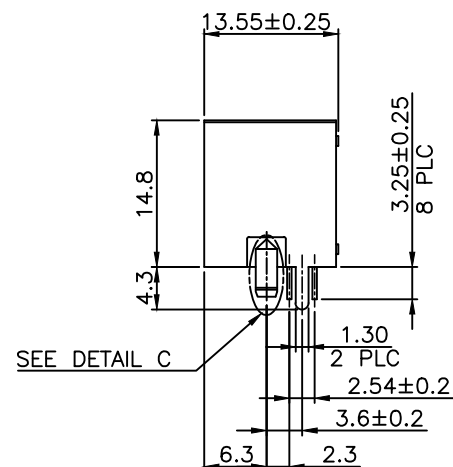


RoHS Compliance


NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.


1. MATERIAL:
HOUSING: PBT, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-BLACK.
CONTACTS: PHOSPHOR BRONZE.
SHELL: BRASS.
2. FINISH:
CONTACTS: $0.152\mu\text{m}$ [$6\mu''$] GOLD PLATED ON ENTIRE CONTACT,
 $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATED
ALL OVER.
SHELL: $0.508\mu\text{m}$ [$20\mu''$] MIN. NICKEL PLATED.

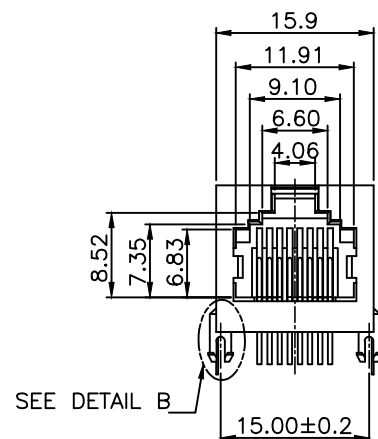

DETAIL B
(SCALE 2:1)



DETAIL C
(SCALE 2:1)

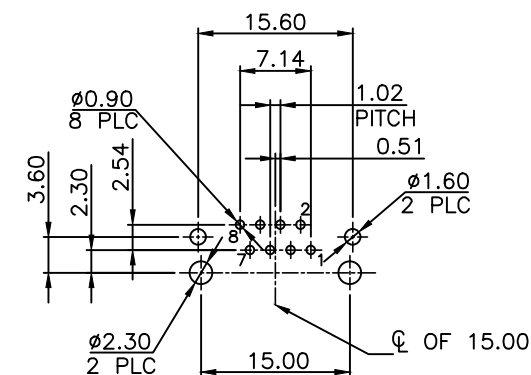


RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 2.0mm
TOLERANCE: ± 0.05 (TOP VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.
DO NOT SCALE DRAWING.

DIMENSIONS:
MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:



THIRD ANGLE PROJECTION

0 PLC $\pm -$
1 PLC ± 0.25
2 PLC ± 0.13
3 PLC ± 0.05
ANGLES $\pm -$

MATERIAL

FINISH

SEE NOTES

SEE NOTES

DWN

A.HUANG

DATE

MAY-15-2013

CHK

M.CHANG

MAY-15-2013

APVD

W.J.YANG



TITLE
RJ45, MINI LOW PROFILE,
WITH SHELL, SIDE ENTRY PCB JACK

SIZE

CAUGE CODE

DRAWING NO

A3

-

961210

WEIGHT

- GRAMS Ref.

REV

7A

SHEET 1

LTR	DESCRIPTION	DATE	APVD
REVISIONS			