


ED/EHD Series

IP67 Waterproof
Connector and Hood



TW Series

Combo "Hybrid"

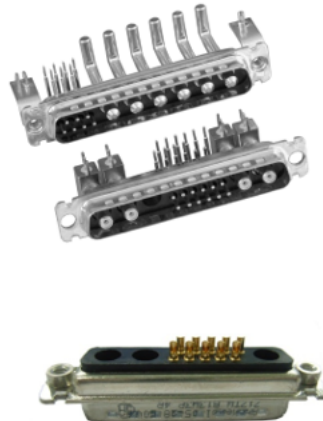


SMT Series

SMT Right Angle



TF Series

Press-Fit



HD, HR, RR, SD & DFR Series

Cable Mount



17H, G17H & 6E17H Series




Stacked
Multi Port




Slim Dsub, Common Items



Photo	Part Number	Pin Count	Gender	Oreintation	Footprint	Configuration
	G17DC091XX3XSEU	9	MALE	R/A	2.00mm	low profile, RIB
	G17DD091X231XHR	9	MALE	R/A	1.20mm	DIP, SINK
	G17DD091X232XHR	9	MALE	R/A	1.20mm	DIP, SINK
	G17AH150XX3XDEU	15	FEMALE	R/A	3.08mm	DIP, BOARDLOCK
	G17DD150XX32MEU	15	FEMALE	R/A	1.65mm	DIP
	G17DD150X231XHR	15	FEMALE	R/A	1.20mm	DIP, SINK
	G17DD150X232XHR	15	FEMALE	R/A	1.20mm	DIP, SINK
	G17DC150X231BEU	15	FEMALE	R/A	1.50mm	SLIM, DIP
	G17DC150XX31XEU	15	FEMALE	R/A	1.50mm	SLIM, DIP

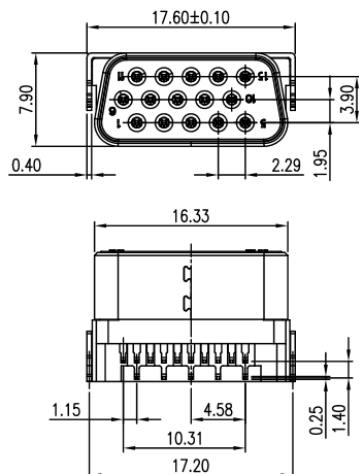

PN: G17DD1520308FHR
PART NO. G17DD152 X 308FHR

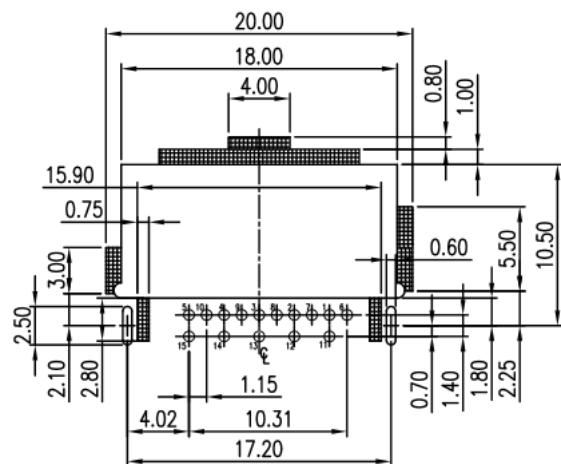

RECOMMENDED P.C.B LAYOUT (THICKNESS=1.00mm)
GENERAL TOLERANCE±0.05mm

Sales window : +886-2-2698 9933 sales@quadrep.com.tw