




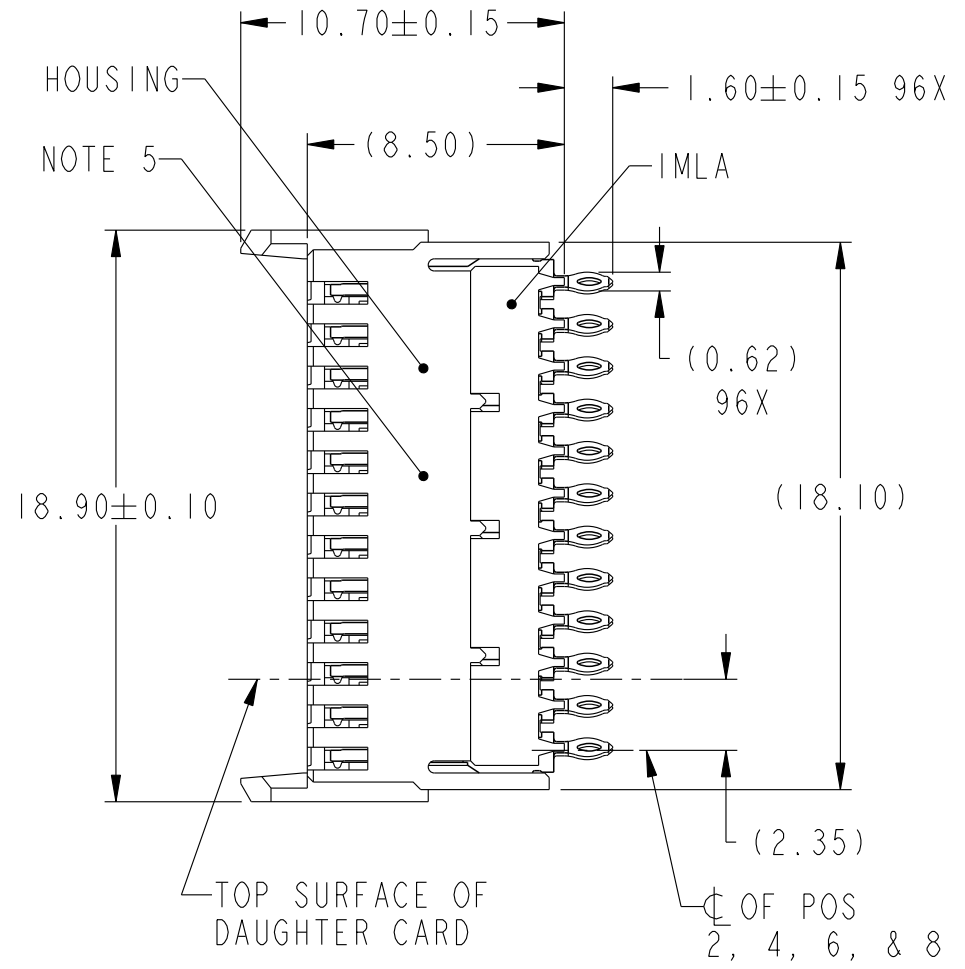



Copyright FCI.

PRODUCT NUMBER  
SEE TABLE, SHT 4


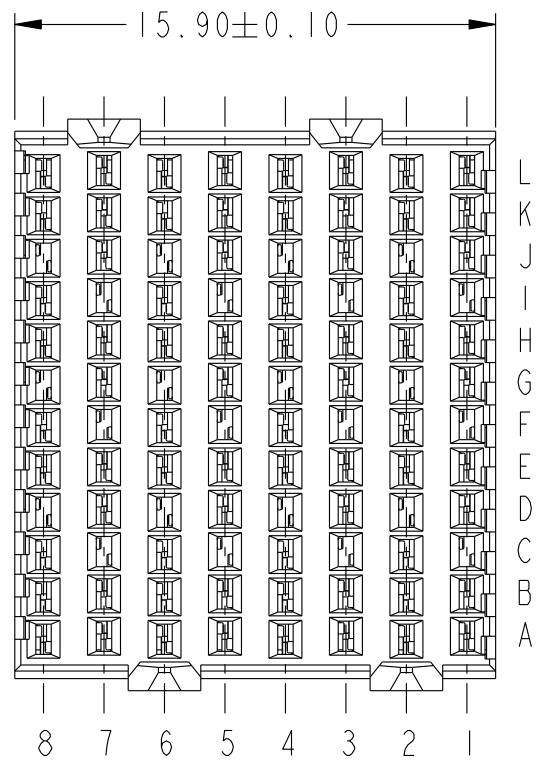


rev	ecn no	dr	date
A	S07-0103	LS	2007-04-05
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface - ASME Y14.5		tolerance std ASME Y14.5		projection 		 MM		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	T.HOUTZ	2005-06-30	ANGULAR  LINEAR		0.X		±		size A4	Scale 4:1	
Eng	C.SHELLY	2005-06-30			0.XX		±				
Chr	C.H TAN	2007-04-05			0.XXX		±				
Appr	JOEY NG	2007-04-05	0° ±°				ECN		***		
			Product family AirMax VS						Spec ref		
			title AirMax VS VERT RECPT ASSY			dwg no 10052842			Rev. A		
			PRESS-FIT, 96 POSITION, 16mm								
			catalog no			-			CUSTOMER		
									sheet 1 of 4		



Copyright FCI.

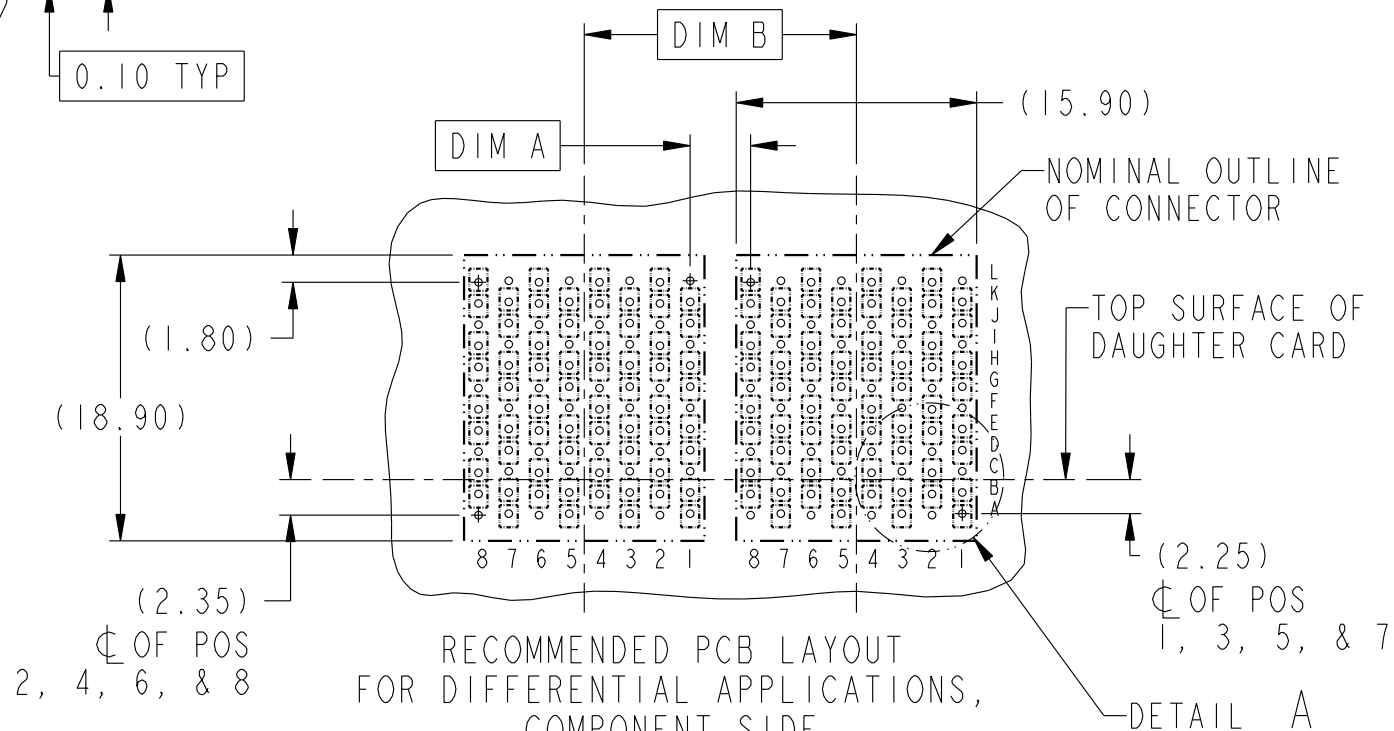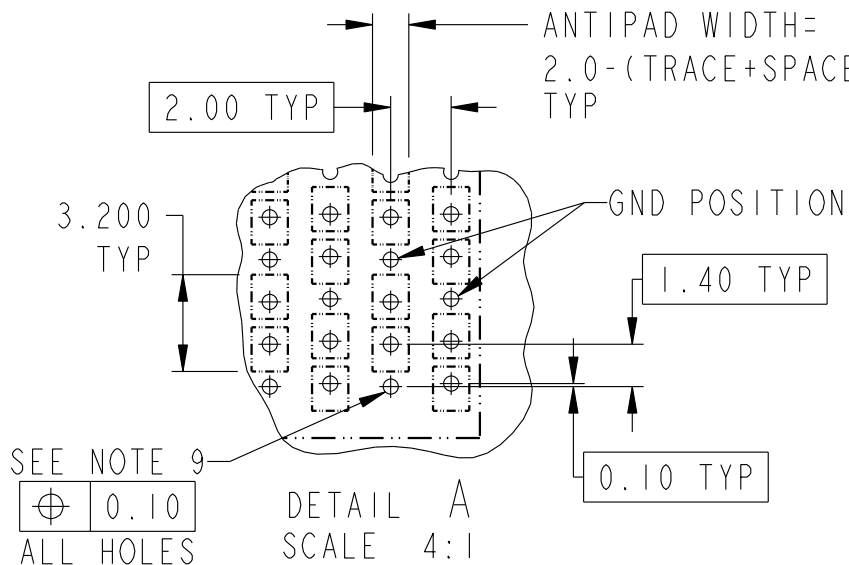

ADJACENT HEADER WIDTHS	DIM A	DIM B
16MM/16MM	2.00	16.00
16MM/18MM	3.00	17.00
18MM/18MM	4.00	18.00



title AirMax VS VERT RECPT ASSY  
PRESS-FIT, 96 POSITION, 16mm  
catalog no -


dwg no 10052842

Rev. A

CUSTOMER sheet 2 of 4



Copyright FCI.

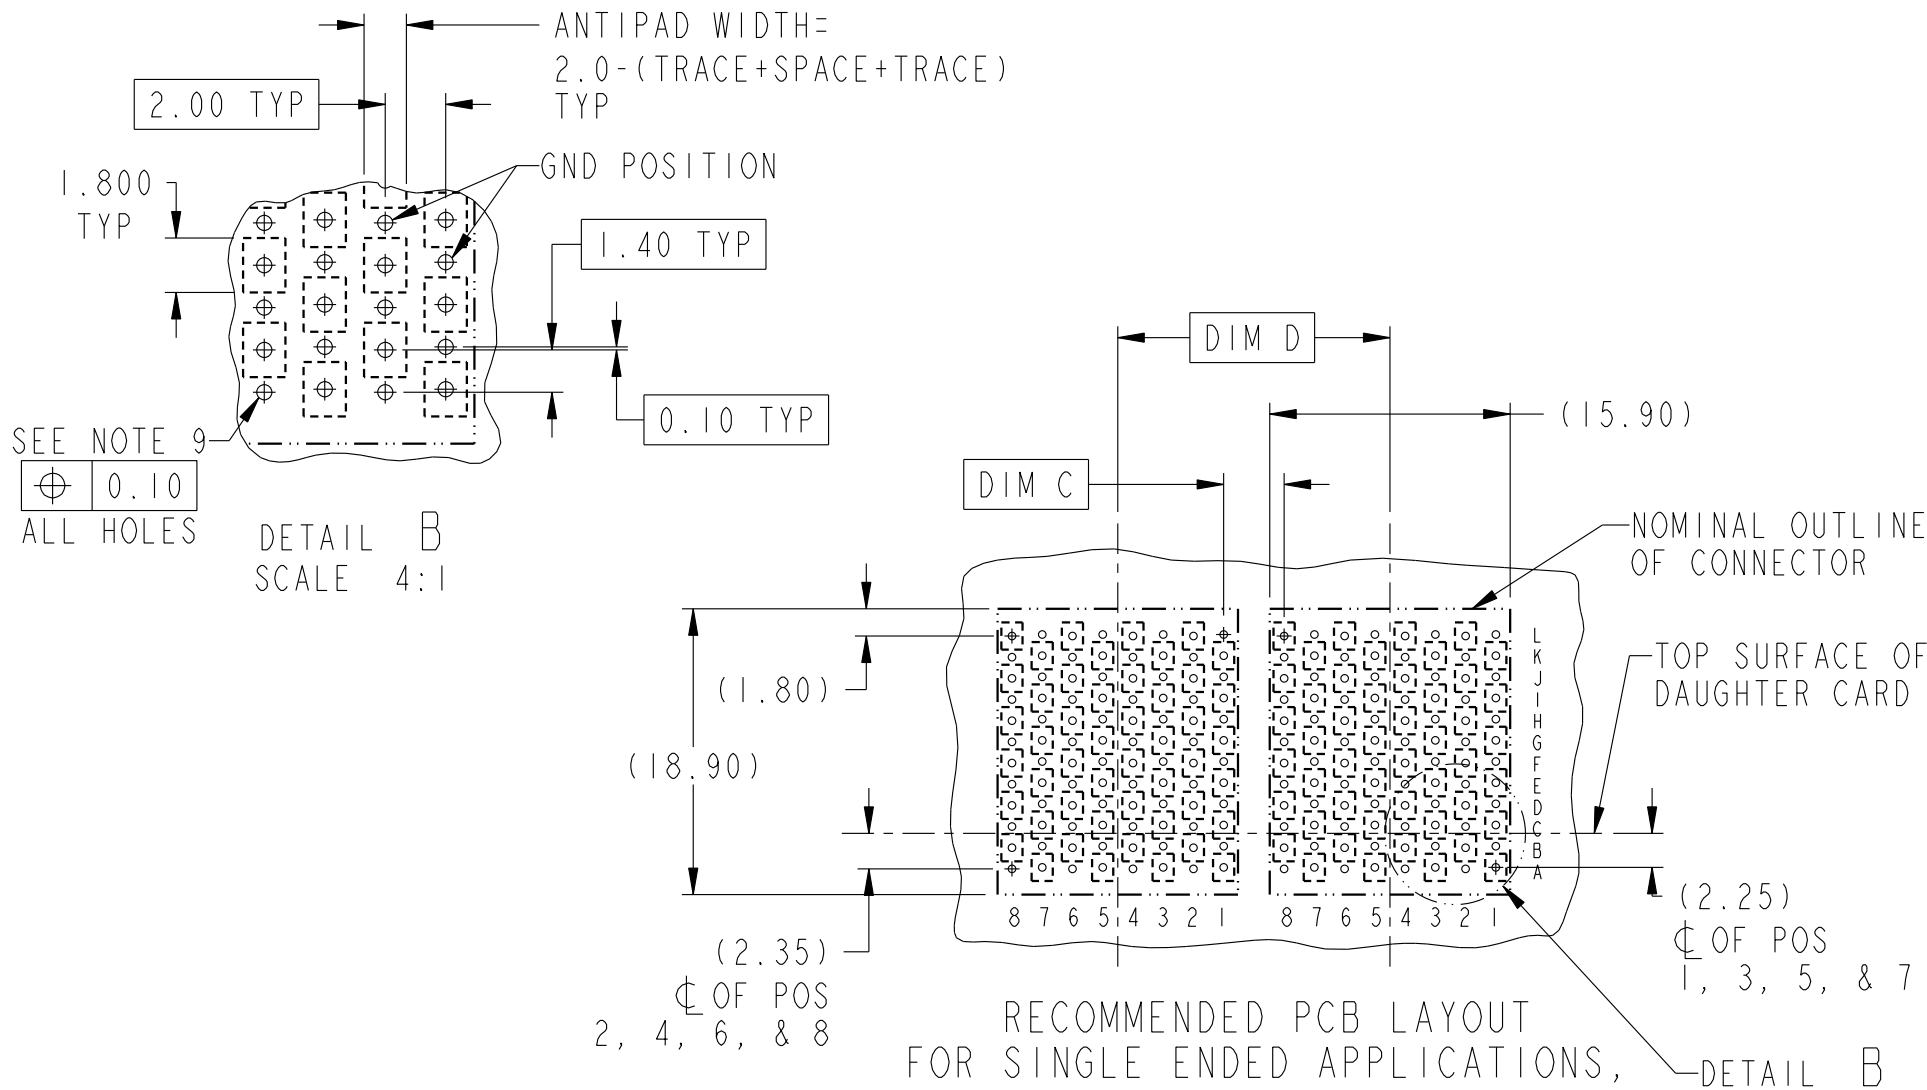

RECOMMENDED PCB LAYOUT  
FOR SINGLE ENDED APPLICATIONS,  
COMPONENT SIDE  
(TWO ADJACENT FOOTPRINTS SHOWN)  
NOTES 6 & 7

ADJACENT HEADER WIDTHS	DIM C	DIM D
16MM/16MM	2.00	16.00
16MM/18MM	3.00	17.00
18MM/18MM	4.00	18.00

	title	AirMax VS VERT RECPT ASSY	dwg no	10052842	Rev.	A
	catalog no	PRESS-FIT, 96 POSITION, 16mm	-	CUSTOMER	sheet 3 of 4	

A

B

C


D

A

B

C

D

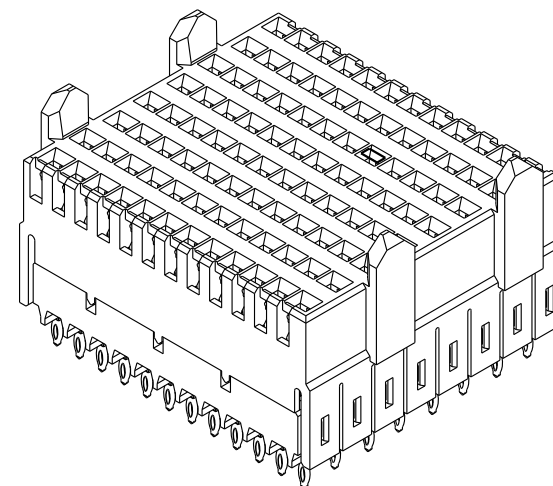

PRODUCT NUMBER	PRESS-FIT TAIL PLATING TYPE
10052842-101	TIN/LEAD ALLOY OVER NICKEL
10052842-101LF	TIN OVER NICKEL (LEAD FREE)

## NOTES:

1. CONNECTOR MATERIALS:  
HOUSING: HIGH TEMP THERMOPLASTIC, NATURAL, UL94V-0  
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94V-0  
CONTACT: COPPER ALLOY
2. CONTACT PLATING:  
SEPARABLE INTERFACE:  
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS  
OF FCI PRODUCT SPECIFICATION GS-12-239, INCLUDING TELCORDIA  
GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE.  
PRESS-FIT TAILS: SEE TABLE
3. PRODUCT SPECIFICATION: GS-12-239
4. APPLICATION SPECIFICATION: GS-20-035
5. PRODUCT MARKING, (PART NUMBER & LOT CODE),  
ON THIS SURFACE
6. REFER TO CUSTOMER DRAWING 10035911 FOR INFORMATION  
REGARDING PCB LAYOUT OF POWER AND GUIDE MODULES  
RELATIVE TO SIGNAL MODULES
7. POSITION F OF ODD NUMBERED COLUMNS AND POSITION G  
OF EVEN NUMBERED COLUMNS CORRESPOND TO EARLY MATE  
HEADER PINS
8. THERE IS NO GROUND BUSSING WITHIN THE CONNECTOR SYSTEM
9. SEE CUSTOMER DRAWING 10045979 FOR INFORMATION ON PCB HOLE  
DIAMTER AND PLATING OPTIONS
10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER  
COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
11. THE HOUSING WILL WITHSTAND EXPOSURE  
TO 260°C PEAK TEMPERATURE FOR  
40 SECONDS IN A CONVECTION, INFRA-RED  
OR VAPOR PHASE REFLOW OVEN
12. PACKAGING MEETS GS-14-920 LEAD FREE  
LABELING SPECIFICATION



title	AirMax VS VERT RECPT ASSY PRESS-FIT, 96 POSITION, 16mm	dwg no	10052842	Rev.	A
catalog no	-	CUSTOMER	sheet 4 of 4		